


Digital Transistors (Built-in Resistors)

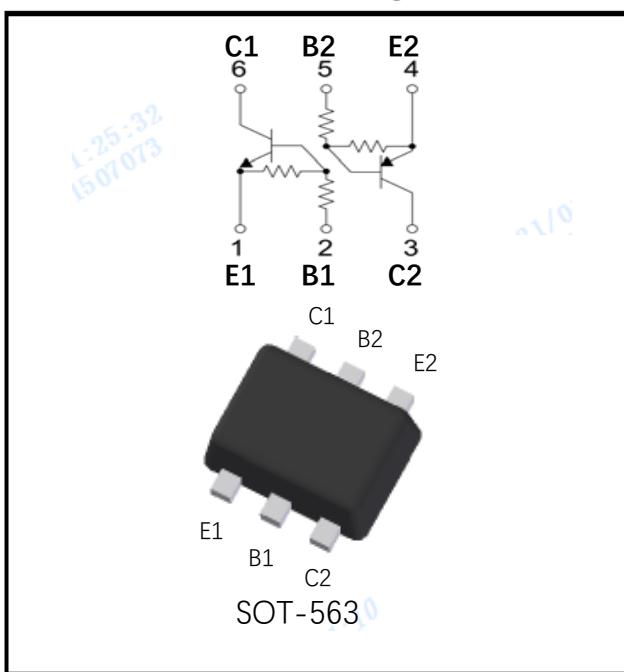

Features

- Epoxy meets UL-94 V-0 flammability rating
- Surface mount package ideally Suited for Automatic Insertion
- NPN+PNP

Mechanical Data

- **Package:** SOT-563
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Marking:** D22
- **Solid point:** E1 positioning point

■Maximum Ratings (Ta=25°C Unless otherwise specified)

DTR1-NPN

Item	Symbol	Unit	Conditions	Value
Supply Voltage	V _{CC}	V		50
Input Voltage	V _{IN}	V		-5 to +30
Output Current	I _O	mA		100
Power Dissipation	P _D	mW		150
Junction Temperature (Single)	T _J	°C		150
Storage Temperature	T _{STG}	°C		-55 to +150

DTR2-PNP

Item	Symbol	Unit	Conditions	Value
Supply Voltage	V _{CC}	V		-50
Input Voltage	V _{IN}	V		-30 to +5
Output Current	I _O	mA		-100
Power Dissipation	P _D	mW		150
Junction Temperature	T _J	°C		150
Storage Temperature	T _{STG}	°C		-55 to +150



EMD22

■Electrical Characteristics (Ta=25°C unless otherwise specified)
DTR1-NPN

Item	Symbol	Unit	Conditions	Min	TYP	Max
Input voltage	VI _(off)	V	V _{CC} =5V,I _C =100uA	0.5	-	-
	VI _(on)	V	V _O =0.3V,I _C =5mA	-	-	1.3
Output voltage	V _{O(on)}	V	I _O /I _i =5mA/0.25 mA	-	-	0.3
Input current	I _i	mA	V _i =5V	-	-	1.8
Output current	I _{O(off)}	uA	V _{CC} =50V, V _i =0	-	-	0.5
DC current gain	G _i		V _O =5V, I _O =10mA	80	-	-
Input resistance	R ₁	kΩ		3.29	4.7	6.11
Resistance ratio	R ₂ /R ₁			8	10	12
Transition frequency	f _T	MHz	V _{CE} =10V,I _E =5mA,f=100MHz	-	250	-

DTR2-PNP

Item	Symbol	Unit	Conditions	Min	TYP	Max
Input voltage	VI _(off)	V	V _{CC} =-5V,I _C =-100uA	-0.5	-	-
	VI _(on)	V	V _O =-0.3V,I _C =-5mA	-	-	-1.3
Output voltage	V _{O(on)}	V	I _O /I _i =-5mA/-0.25 mA	-	-	-0.3
Input current	I _i	mA	V _i =-5V	-	-	-1.8
Output current	I _{O(off)}	uA	V _{CC} =-50V, V _i =0	-	-	-0.5
DC current gain	G _i		V _O =-5V, I _O =-10mA	80	-	-
Input resistance	R ₁	kΩ		3.29	4.7	6.11
Resistance ratio	R ₂ /R ₁			8	10	12
Transition frequency	f _T	MHz	V _{CE} =-10V,I _E =-5mA,f=100MHz	-	250	-

■ Ordering Information (Example)

Preferred P/N	Packing Code	Unit Weight(G)	Minimum Package(Pcs)	Inner Box Quantity(Pcs)	Outer Carton Quantity(Pcs)	Delivery Mode
EMD22	F2	Approximate 0.0035	3000	30000	120000	7" reel

■ Characteristics (Typical)

Fig. 1 - DTR1 DC Current Gain Characteristics

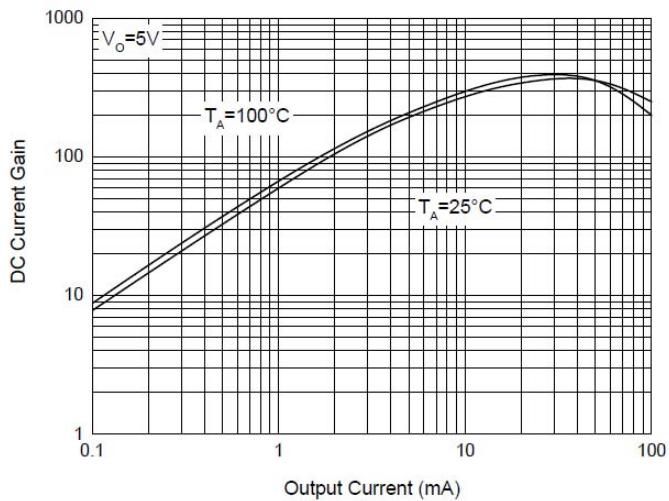


Fig. 2 - DTR1 Input Voltage (on) Characteristics

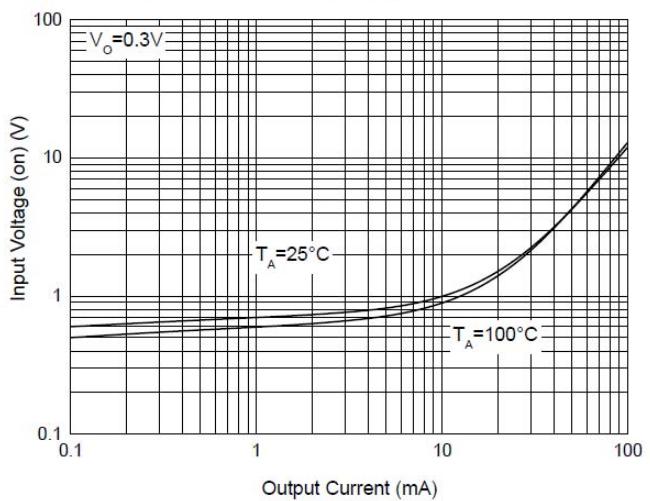


Fig. 3 - DTR1 Input Voltage (off) Characteristics

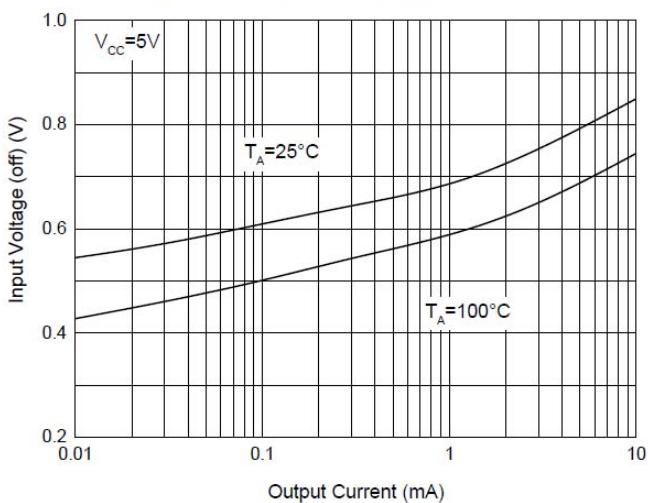


Fig. 4 - DTR1 Output Voltage Characteristics

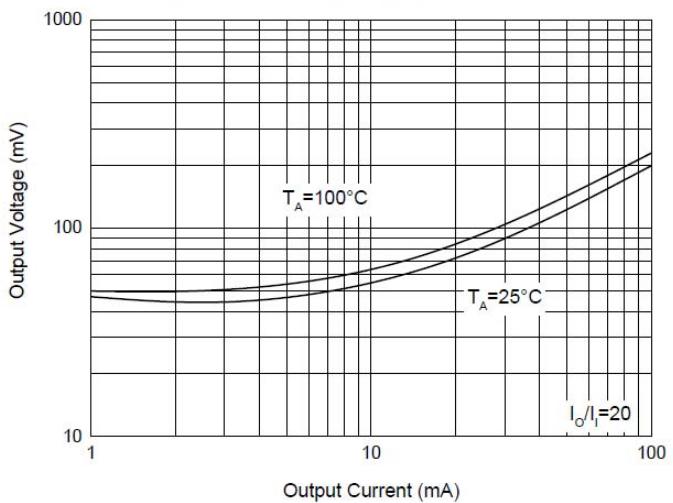


Fig. 5 - DTR2 DC Current Gain Characteristics

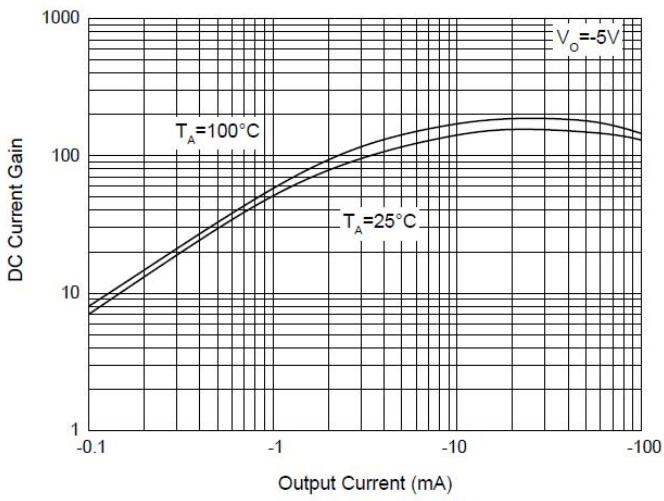


Fig. 6 - DTR2 Input Voltage (on) Characteristics

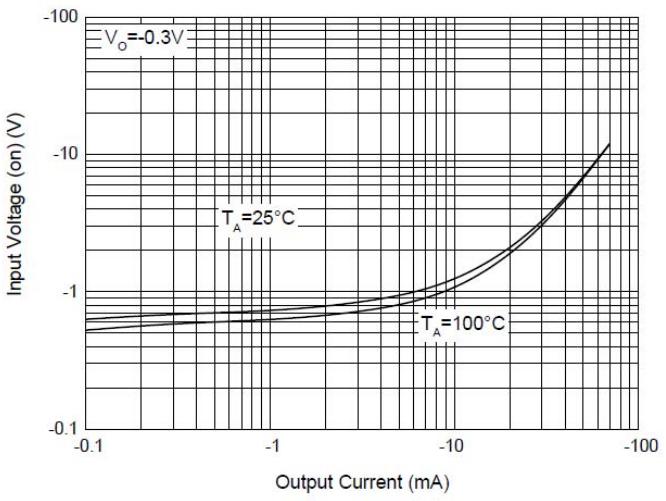




Fig. 7 - DTR2 Input Voltage (off) Characteristics



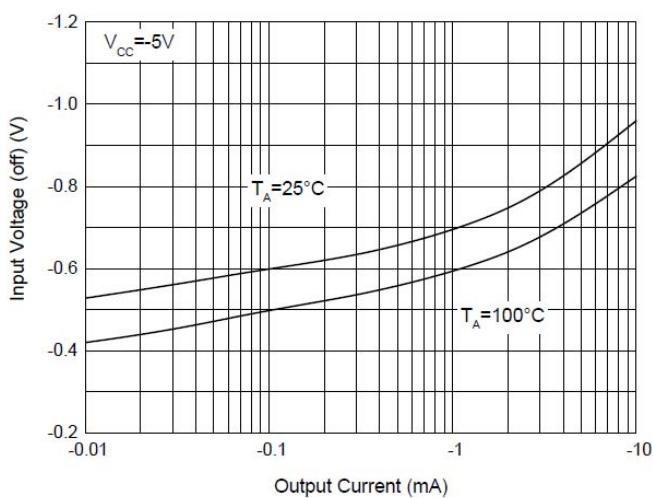


Fig. 4 - DTR2 Output Voltage Characteristics

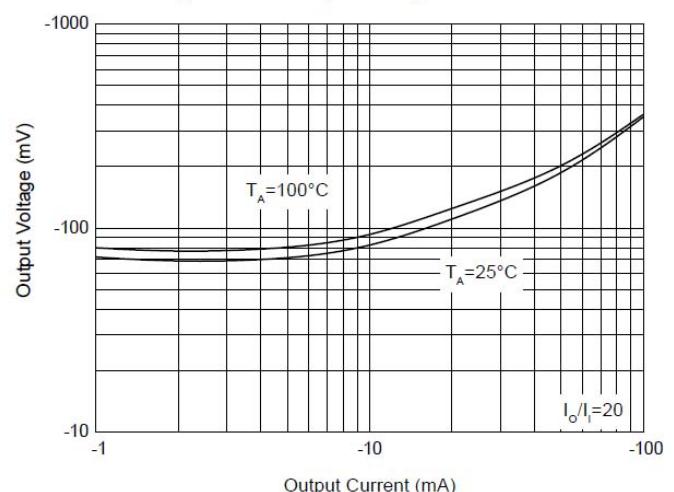


**■ Outline Dimensions**


SOT-563



TOP VIEW

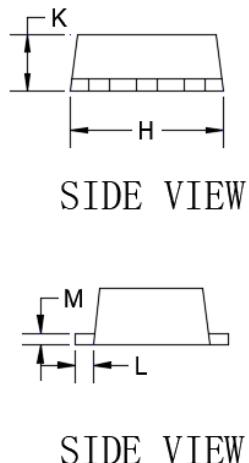

DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.006	0.011	0.150	0.300
B	0.043	0.051	1.100	1.300
C	0.059	0.067	1.500	1.700
D	0.016	0.024	0.400	0.600
G	0.035	0.043	0.900	1.100
H	0.059	0.067	1.500	1.700
K	0.021	0.026	0.550	0.650
L	0.004	0.011	0.100	0.300
M	0.004	0.007	0.100	0.180

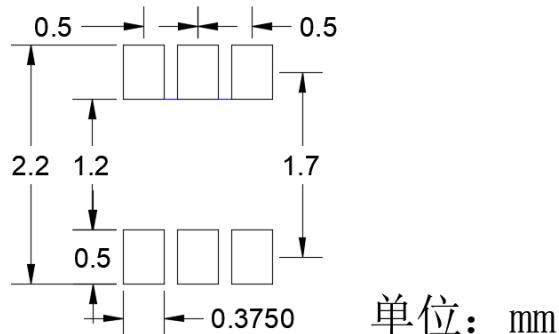■ Suggested Pad Layout

单位: mm

SUGGESTED SOLDER PAD LAYOUT



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website <http://www.21yangjie.com>, or consult your nearest Yangjie's sales office for further assistance.