


## NPN Power Transistors

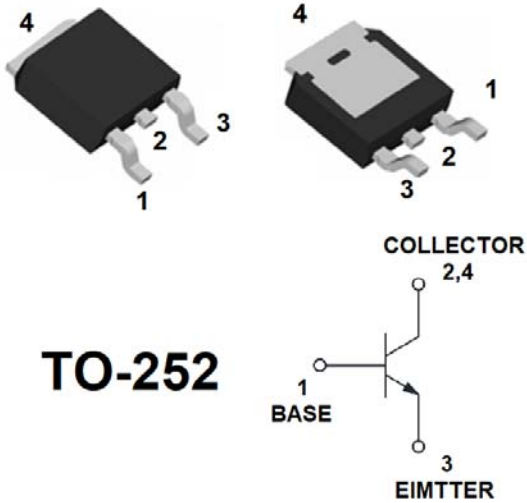

### Features

- Epoxy meets UL-94 V-0 flammability rating and halogen free
- Moisture Sensitivity Level 1
- Part no. with suffix "Q" means AEC-Q101 qualified

### Applications

- Designed for general purpose amplifier and low speed switching applications.

### Mechanical Data

- Case: TO-252
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102

### ■ Maximum Ratings (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Value
Collector-Base Voltage	$V_{CBO}$	V	100
Collector-Emitter Voltage	$V_{CEO}$	V	100
Emitter-Base Voltage	$V_{EBO}$	V	5
Collector Current -Continuous	$I_C$	A	6
Total Device Dissipation <sup>(*)</sup>	$P_D$	W	1.25
Thermal Resistance, Junction to Ambient Air <sup>(*)</sup>	$R_{thJA}$	°C/W	100
Thermal Resistance, Junction to Mounting Base	$R_{thJ-mb}$	°C/W	8.3
Junction Temperature	$T_j$	°C	-55 to +150
Storage Temperature	$T_{STG}$	°C	-55 to +150

(\*) Device mounted on FR-4 PCB 15 x 17 x 0.8 mm



# MJD41CQ

## ■ Electrical Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Collector-base breakdown voltage	$V_{CBO}$	V	$I_C=0.1mA, I_E=0$	100		
Collector-emitter breakdown voltage	$V_{CEO}$	V	$I_C=30mA, I_B=0$	100		
Emitter-base breakdown voltage	$V_{EBO}$	V	$I_E=0.1mA, I_C=0$	5		
Collector-base cut-off current	$I_{CEO}$	$\mu A$	$V_{CE}=60V, I_B=0$			50
Emitter-base cut-off current	$I_{EBO}$	mA	$V_{EB}=5V, I_C=0$			0.5
DC current gain	$h_{FE}$		$V_{CE}=4V, I_C=1A$	30		
			$V_{CE}=4V, I_C=3A$	15		155
Collector-emitter saturation voltage	$V_{CE(sat)}$	V	$I_C=6A, I_B=0.6A$			1.5
Base-emitter voltage	$V_{BE}$	V	$I_C=6A, V_{CE}=4V$			2.0

## ■ Other Characteristics (Ta=25°C unless otherwise noted)

Item	Symbol	Unit	Conditions	Min	Typ	Max
Transition frequency	$f_T$	MHZ	$V_{CE}=10V, I_C=0.5A, f=1KHZ$	3		

## ■ Ordering Information (Example)

PREFERRED P/N	PACKING CODE	Marking	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
MJD41CQ	F1	MJD41C	2500	2500	25000	13"Reel

## ■ Characteristics(Typical)

Fig.1 - Static characteristic


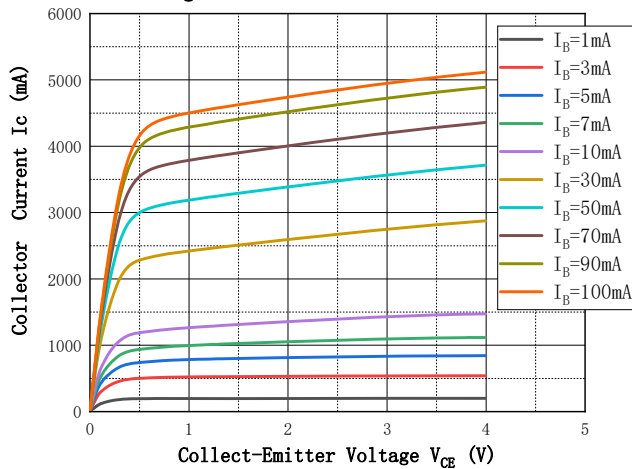


Fig.2 - DC Current Gain



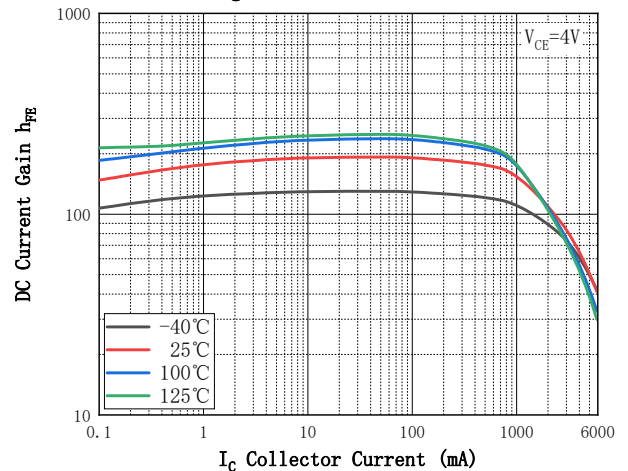

# MJD41CQ

Fig.3 - Collect-Emmitter Saturation Voltage

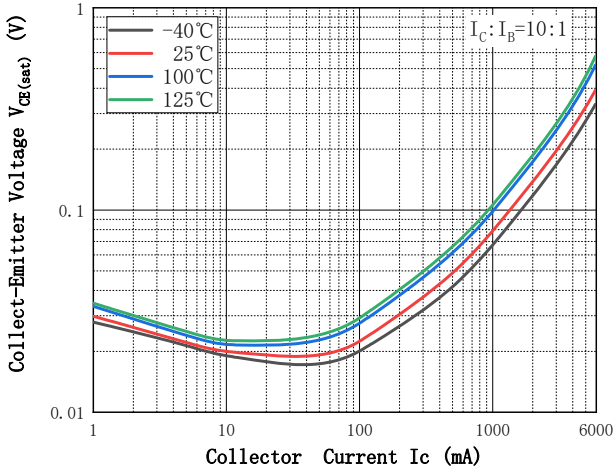


Fig.4 - Base-Emmitter Voltage

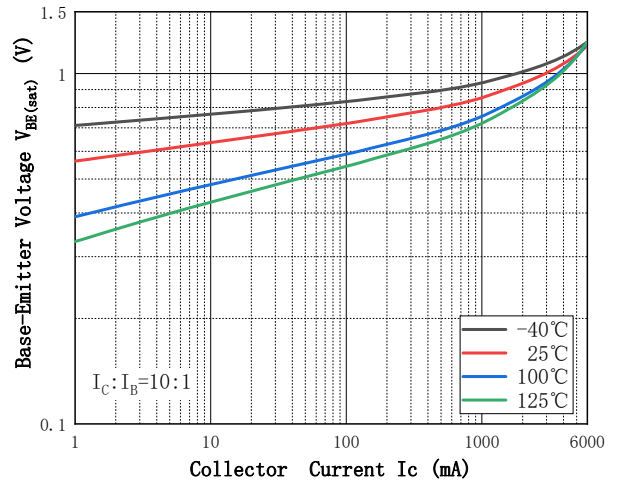


Fig.5 - Base-Emmitter On Voltage

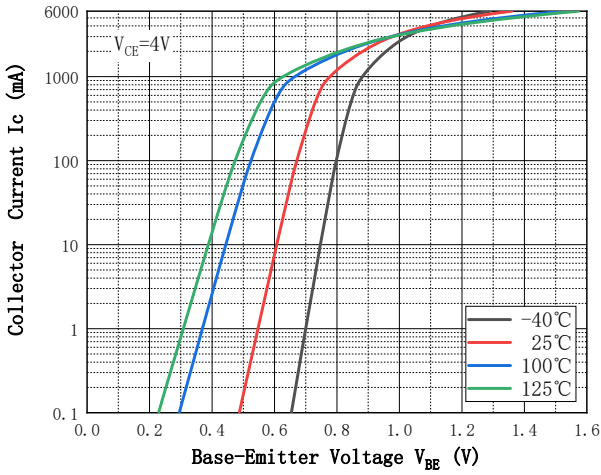


Fig.6 - Cob/Cib—VCB/VEB


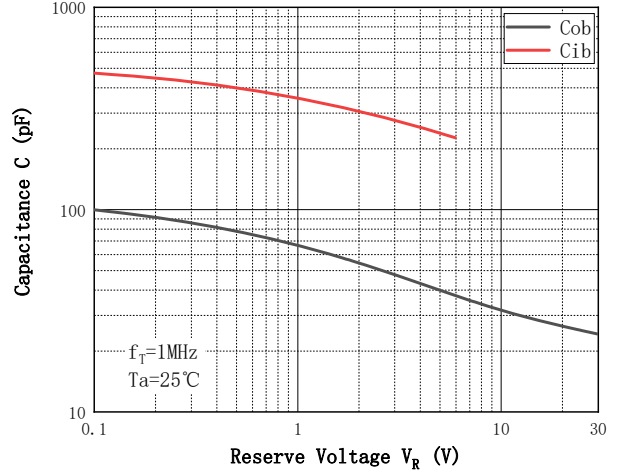


Fig.7 - Transient thermal impedance



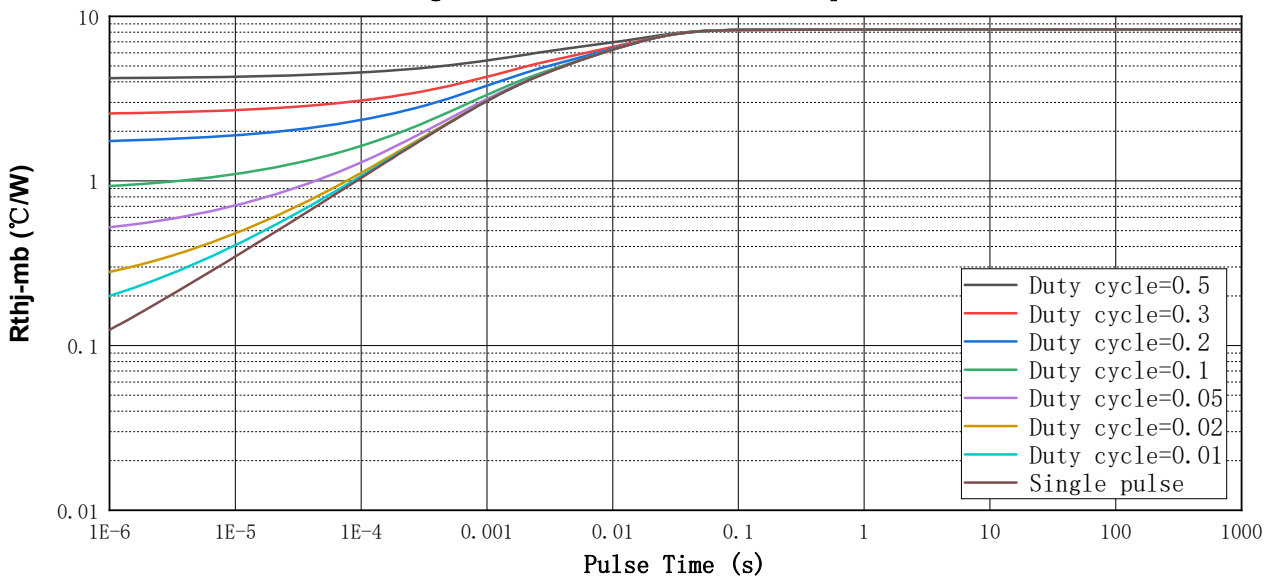

# MJD41CQ

Fig.8 - Collector Power Derating Curve



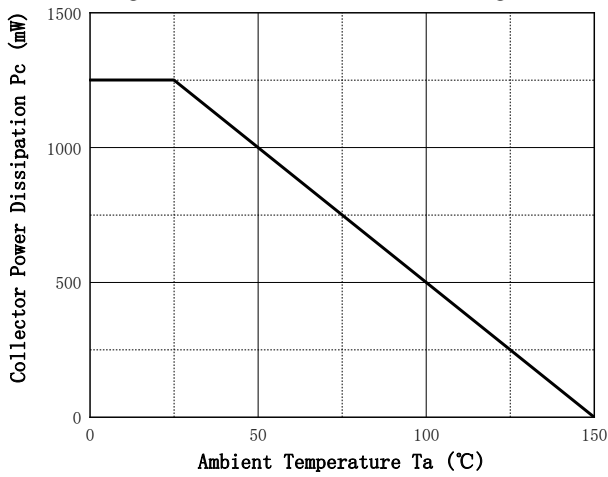


Fig.9 - Safe Operating Area

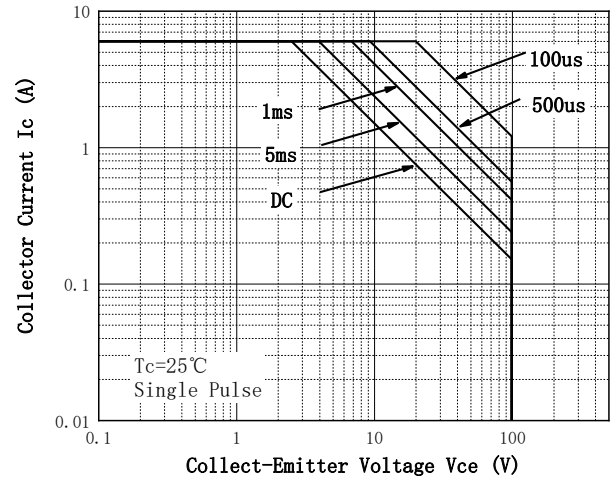

## TO-252 Package information

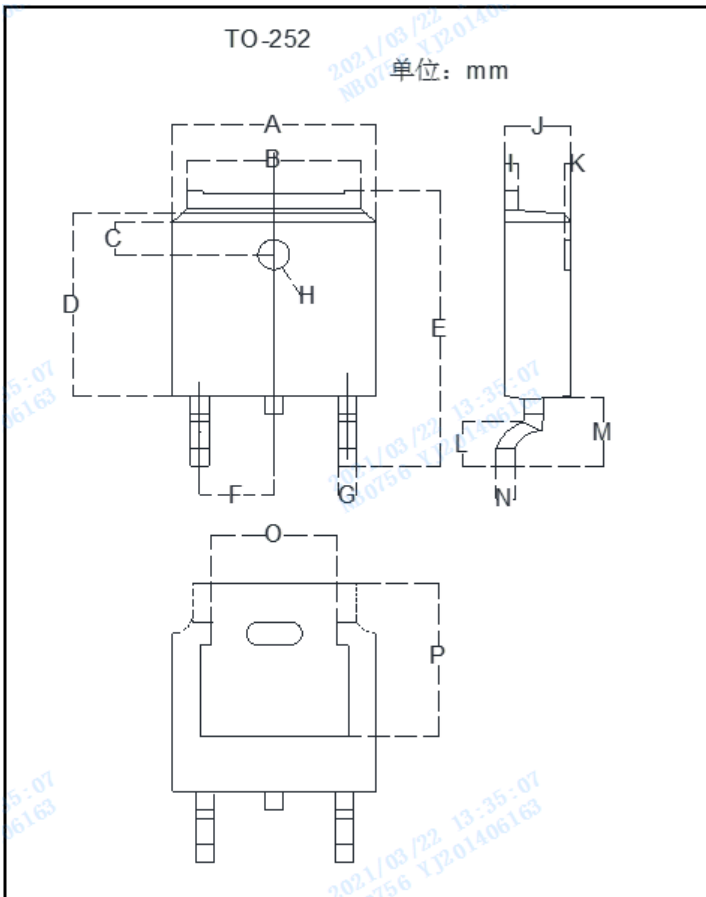


DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.256	0.264	6.50	6.70	
B	0.201	0.215	5.10	5.46	
C	0.055	0.071	1.40	1.80	
D	0.236	0.244	6.00	6.20	
E	0.394	0.409	10.00	10.40	
F	0.085	0.093	2.17	2.37	
G	0.026	0.034	0.66	0.86	
H	Φ0.041	Φ0.531	Φ1.050	Φ1.350	
I	0.018	0.023	0.46	0.58	
J	0.087	0.094	2.20	2.40	
K	0.000	0.012	0.00	0.30	
L	0.035	0.090	0.89	2.29	
M	0.107	0.121	2.73	3.08	
N	0.017	0.023	0.43	0.58	
O	0.165	0.195	4.20	4.95	
P	0.203	0.215	5.15	5.45	



# MJD41CQ

## ■ Suggested Pad Layout

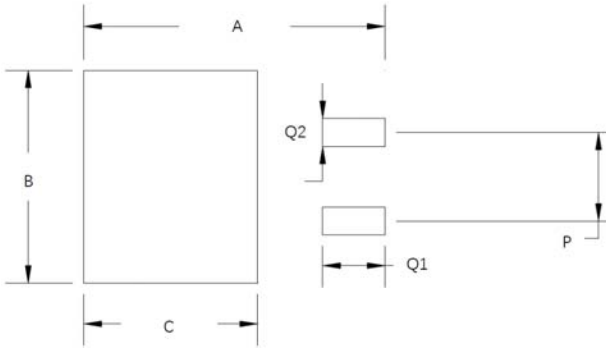

Dim	Millimeters
A	11.4
B	6.74
C	6.23
P	4.56
Q1	2.28
Q2	1.52



## MJD41CQ

---

### Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, life-saving, lifesustaining, or military, Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.