


Surface Mount Super Fast Recovery Rectifier

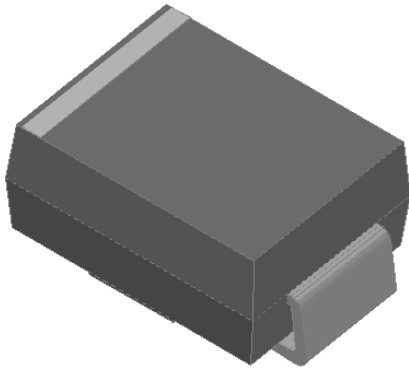


Features

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- High forward surge capability
- Super Fast reverse recovery time
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C
- Part no. with suffix "Q" means AEC-Q101 qualified

Typical Applications

For use in high frequency rectification of power supplies, inverters, converters, and freewheeling diodes for consumer automotive and telecommunication.



Mechanical Data

- **Package:** DO-214AA (SMB)
Molding compound meets UL 94 V-0 flammability rating, RoHS-compliant, halogen-free
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102
- **Polarity:** Cathode line denotes the cathode end

■Maximum Ratings (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	UG2AQ	UG2BQ	UG2CQ	UG2DQ
Device marking code			UG2A	UG2B	UG2C	UG2D
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	V	50	100	150	200
Maximum RMS Voltage	V _{RMS}	V	35	70	105	140
Maximum DC blocking Voltage	V _{DC}	V	50	100	150	200
Average rectified output current @60Hz sine wave, resistance load, T _L (Fig.1)	I _O	A	2.0			
Forward Surge Current (Non-repetitive) @60Hz Half-sine wave, 1 cycle, T _J =25°C	I _{FSM}	A	50			
Current squared time @1ms≤t≤8.3ms T _J =25°C	I ² t	A ² s	10.375			
Storage temperature	T _{stg}	°C	-55 ~ +150			
Junction temperature	T _J	°C	-55 ~ +150			



UG2AQ THRU UG2DQ

■Electrical Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS	UG2AQ	UG2BQ	UG2CQ	UG2DQ
Maximum instantaneous forward voltage	V _F	V	I _F =2.0A	0.92			
Maximum reverse recovery time	T _{RR}	ns	I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	25			
Maximum DC reverse current at rated DC blocking voltage per diode@ V _{RM} =V _{RRM}	I _R	μA	T _J =25°C	2			
			T _J =125°C	20			
Typical junction capacitance	C _J	pF	V _R =4V, f=1MHz	25			

■Dynamic Characteristics

PARAMETER	SYMBOL	UNIT	TEST CONDITIONS		UG2AQ	UG2BQ	UG2CQ	UG2DQ
Typical reverse Recovery Time	T _{RR}	ns	T _J =25°C	I _F =1A, di/dt=-50A/us V _{RM} =30V	26			
			T _J =25°C	I _F =2A di/dt=-200A/us V _{RM} =100V	25			
			T _J =125°C		30			
Typical peak recovery current	I _{RRM}	A	T _J =25°C		3.5			
			T _J =125°C		6			
Typical reverse recovery charge	Q _{rr}	nC	T _J =25°C		47			
			T _J =125°C		85			
Minimum non-repetitive avalanche energy	EAS	mJ	T _J =25°C	I _R =1.8 A, L=15 mH	24.3			

■Thermal Characteristics (T_a=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	UG2AQ	UG2BQ	UG2CQ	UG2DQ
Typical Thermal resistance	R _{θJ-A(1)}	°C/W	70			
	R _{θJ-L(1)}		20			
	R _{θJ-C(1)}		15			

Note:
(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.3" x 0.3" (8.0 mm x8.0 mm) copper pad areas



UG2AQ THRU UG2DQ

■ Characteristics (Typical)

Fig.1:Forward Current Derating Curve

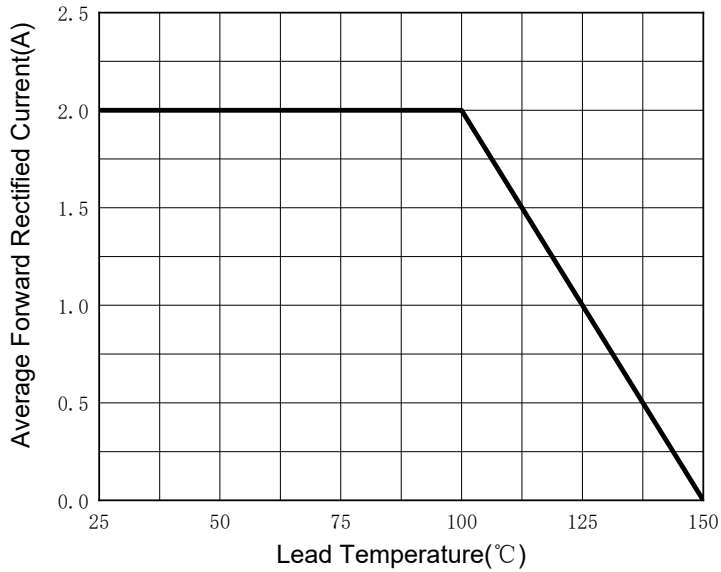


Fig.2:Maximum Non-Repetitive Peak Forward Surge Current

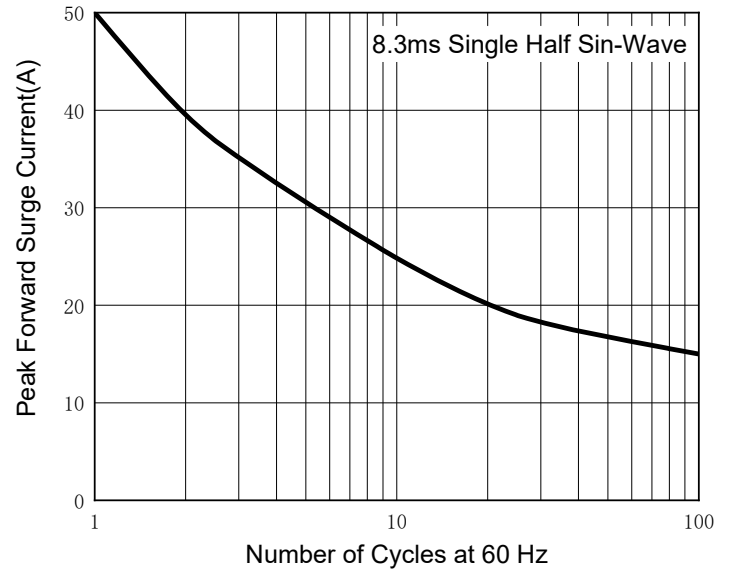


Fig.3:Typical Instantaneous Forward Characteristics


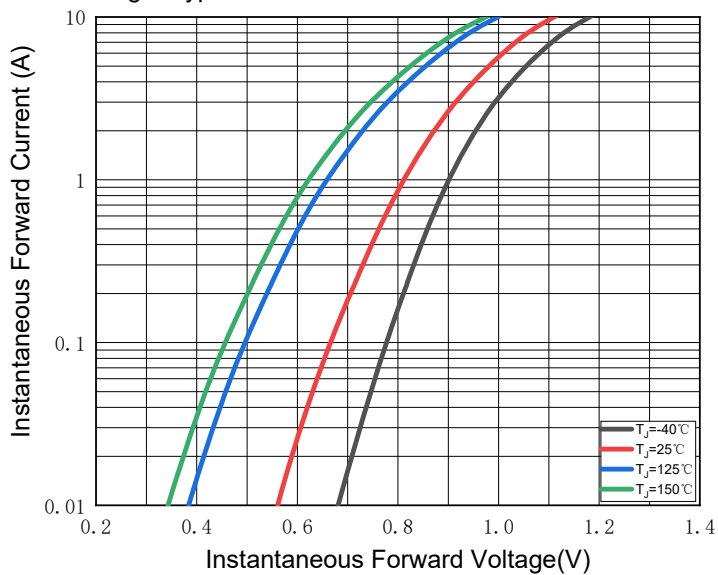



Fig.4:Typical Reverse Leakage Characteristics



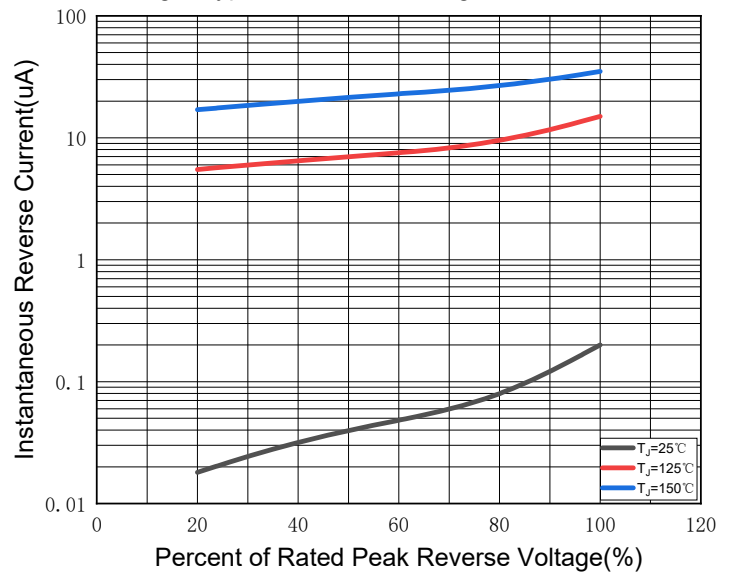

UG2AQ THRU UG2DQ


FIG.5: Diagram of circuit and Testing wave form of reverse recovery time

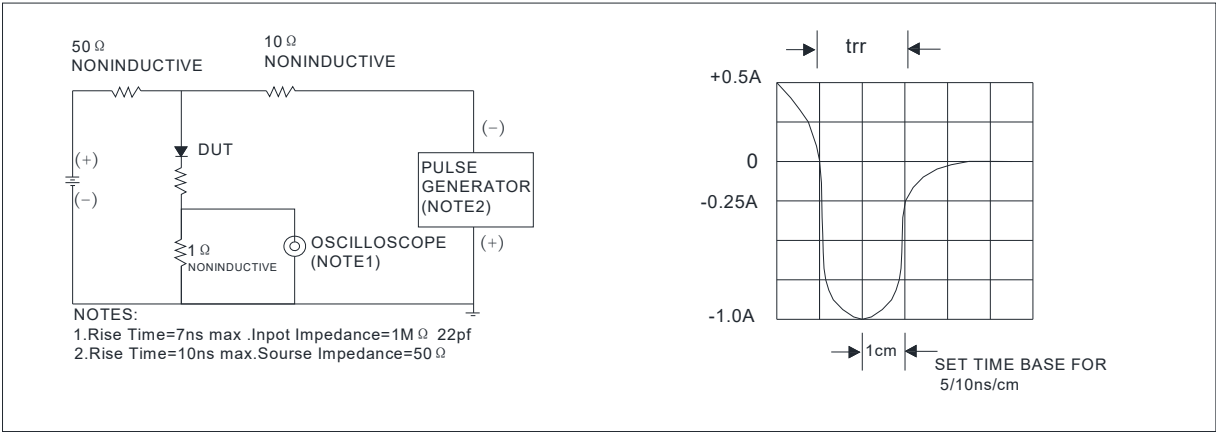

Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
UG2AQ-UG2DQ	F1	Approximate 0.1	3000	48000	13" reel

Marking Information

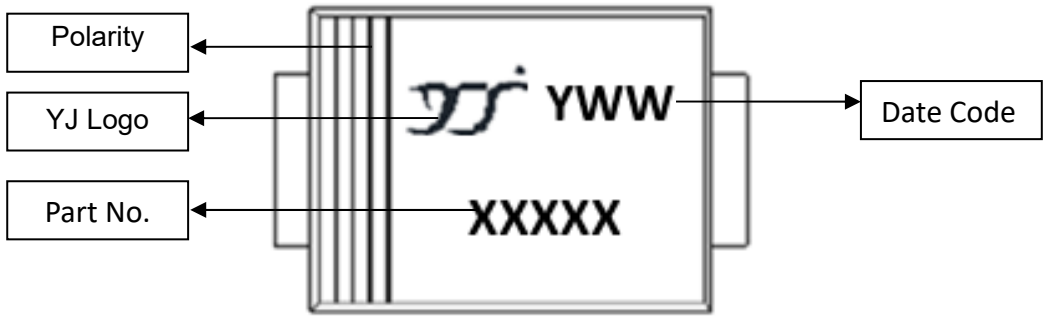

Note:

1. All marking is at middle of the product body
2. All marking is in laser printing
3. XXXXXX is marking code, like U1DQ marking code is U1D
4. Body color: Black
5. YWW is date code, "Y" is year. "WW" is week.

For instance:


The 17th week of 2021, date code is 117

The 17th week of 2022, date code is 217




UG2AQ THRU UG2DQ

■ Outline Dimensions

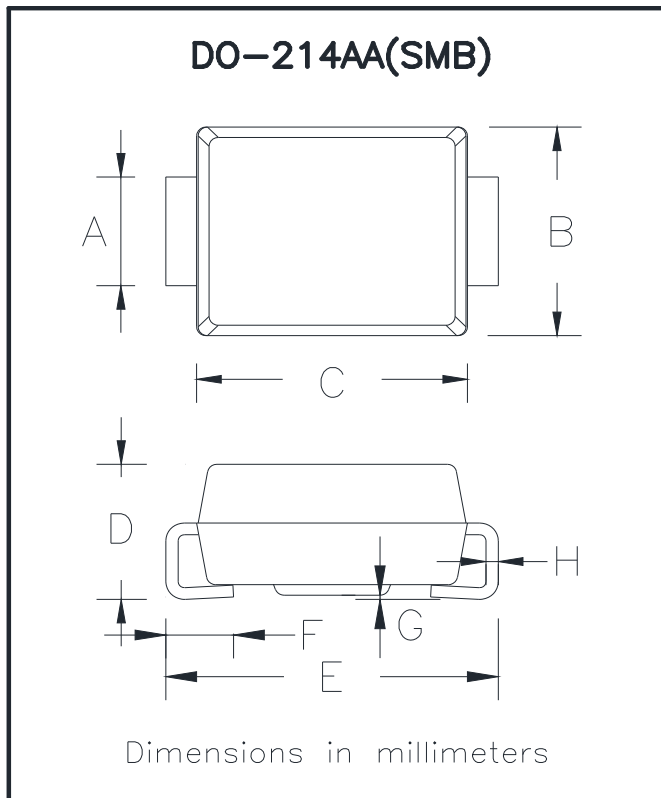

DO-214AA(SMB)		
Dim	Min	Max
A	1.85	2.15
B	3.30	3.94
C	4.05	4.75
D	1.99	2.61
E	5.21	5.59
F	0.90	1.41
G	0.05	0.20
H	0.15	0.31

■ Suggested pad layout

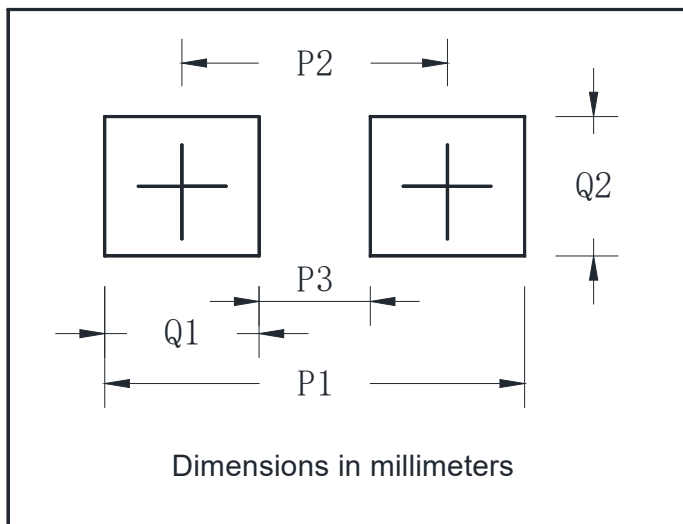

DO-214AA(SMB)	
Dim	Millimeters
P1	6.8
P2	4.3
P3	1.8
Q1	2.5
Q2	2.3



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with automotive electronics, are not designed for use in medical, lifesaving, lifesustaining, or military. Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.