


Schottky Barrier Diode

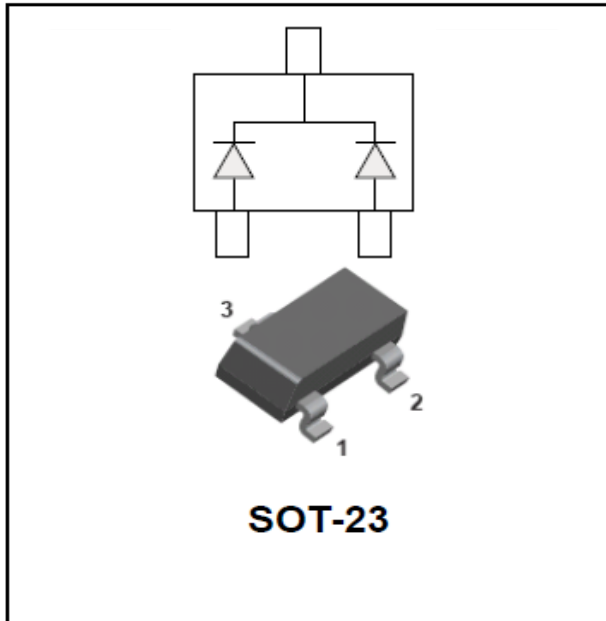

Features

- Epoxy meets UL-94 V-0 flammability rating, halogen-free
- Moisture Sensitivity Level 1
- Low Forward Voltage
- Surface Mount device

Mechanical data

- Package: SOT-23
- Terminals: Tin plated leads, solderable per J-STD-002 and JESD22-B102
- Marking: D3Q

■Maximum Rating, ($T_A=25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Value
Peak Reverse Voltage	V_{RM}	V	40
DC Reverse Voltage	V_R	V	25
Forward Continuous Current	I_F	mA	500
Non-Repetitive Peak Forward Surge Current @8.3ms half-sine wave	I_{FSM}	A	2
Total Power Dissipation @ $T_A=25^{\circ}\text{C}$	P_D	mW	250
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	$^{\circ}\text{C}/\text{W}$	400
Junction Temperature	T_J	$^{\circ}\text{C}$	-55 to +125
Storage temperature range	T_{stg}	$^{\circ}\text{C}$	-55 to +125

■Ordering Information (Example)

PREFERRED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
RB495DS	F2	Approximate 0.008	3000	30000	120000	7" reel







RB495DS

■ Electrical Characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Unit	Conditions	Value
Maximum Instantaneous Forward Voltage	V _F	V	I _{FM} =10mA	0.3
			I _{FM} =200mA	0.5
Maximum DC Reverse Current	I _R	uA	V _R =25V	70


■ Typical Characteristics

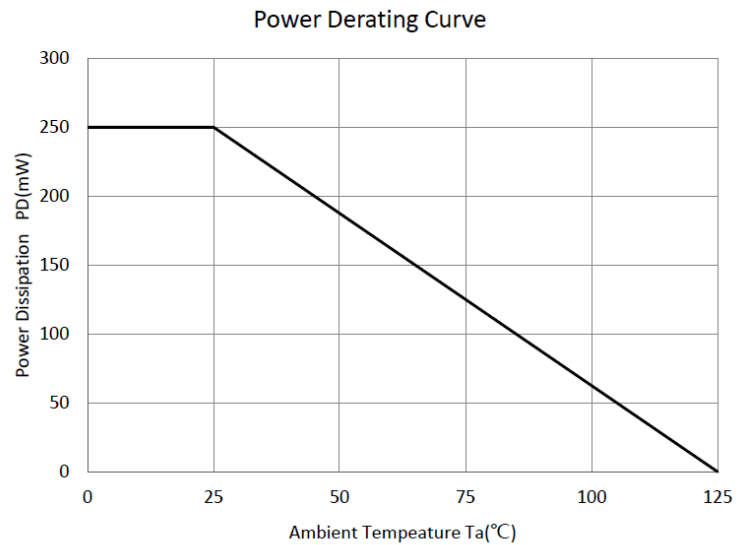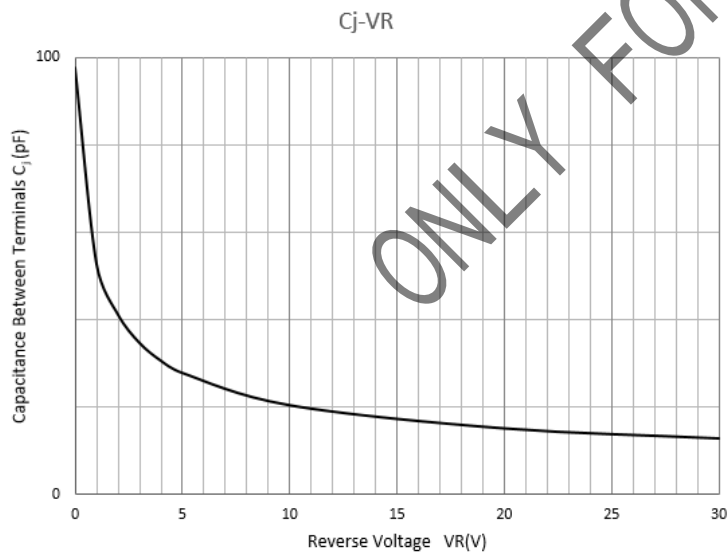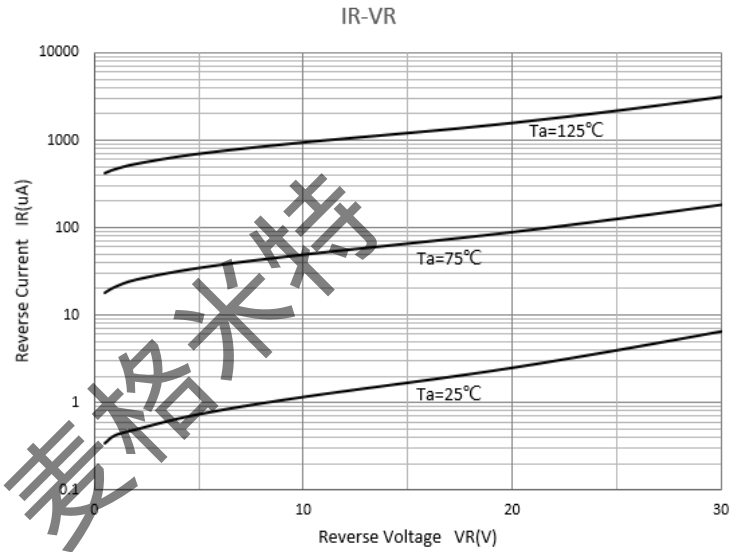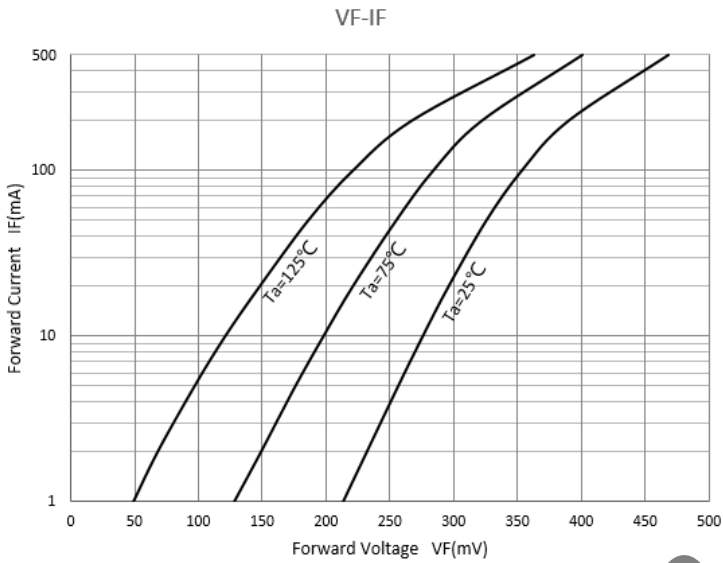




RB495DS

■SOT-23 Package Outline Dimensions

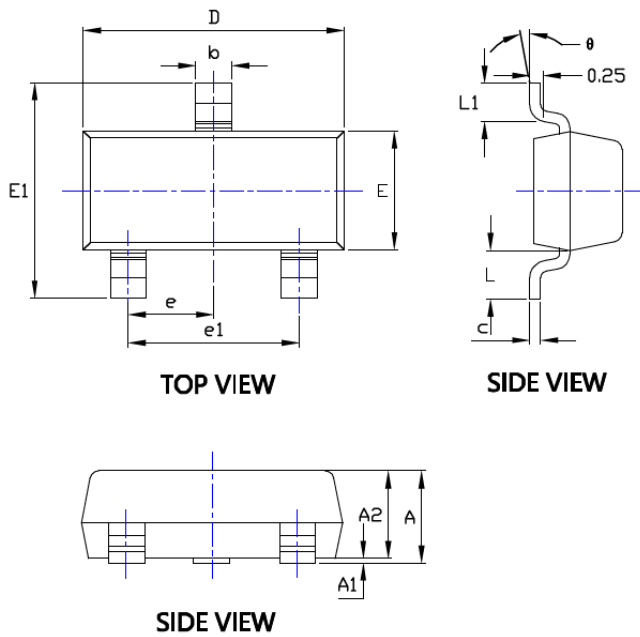

SYMBOL	DIMENSIONS			
	INCHES		Millimeter	
	MIN.	MAX.	MIN.	MAX.
A	0.035	0.045	0.900	1.150
A1	0.000	0.004	0.000	0.100
A2	0.035	0.041	0.900	1.050
b	0.012	0.020	0.300	0.500
c	0.004	0.008	0.100	0.200
D	0.110	0.118	2.800	3.000
E	0.047	0.055	1.200	1.400
E1	0.089	0.100	2.250	2.550
e	0.037TYP		0.950TYP	
e1	0.071	0.079	1.800	2.000
L	0.022REF		0.550REF	
L1	0.012	0.200	0.300	0.500
θ	0°	8°	0°	8°

■SOT-23 Soldering Footprint

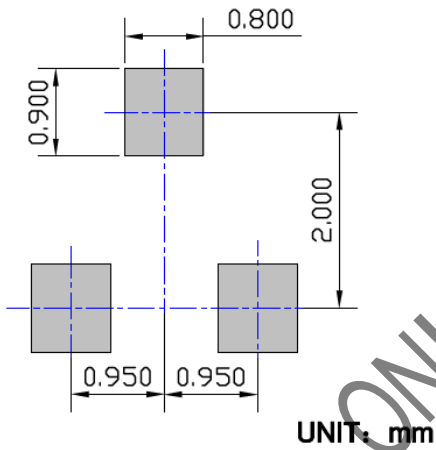



RB495DS

Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.

ONLY FOR 麦格米特